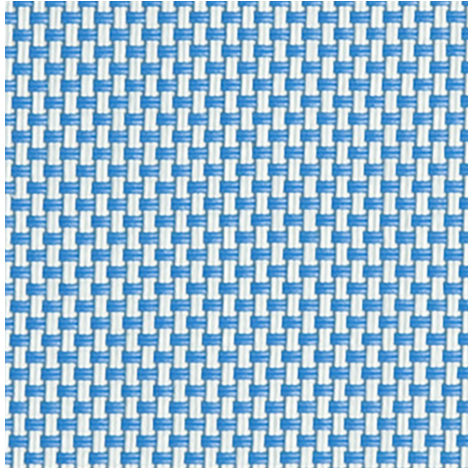
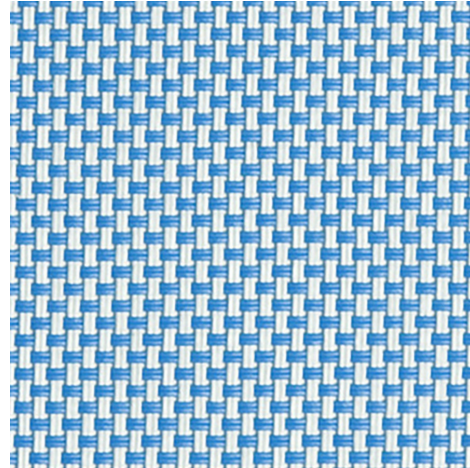


**Natté 380 (end 31.12.2024) - white |  
turquoise (002014)**
**Technical info**
**FRONT**

**BACK**


|                                           |                     |                                               |
|-------------------------------------------|---------------------|-----------------------------------------------|
| <b>Widths</b>                             |                     | 250 cm                                        |
| <b>Composition</b>                        |                     | Fibreglass 36% - PVC 64%                      |
| <b>Openness factor</b>                    | NBN EN 410          | 5.00%                                         |
| <b>Weight</b>                             | NF EN 12127         | 385.00 g/m <sup>2</sup>                       |
| <b>Thickness</b>                          | ISO 5084            | 0.35 mm                                       |
| <b>Density</b>                            | ISO 7211/2          | WARP 20.00 yarn/cm      WEFT 20.00 yarn/cm    |
| <b>Color fastness to artificial light</b> | ISO 105 B02         | >7                                            |
| <b>Roll length</b>                        |                     | 30 m                                          |
| <b>Cleaning</b>                           |                     | With soapy water                              |
| <b>Confection</b>                         |                     | By heat, high frequency or ultrasonic welding |
| <b>Fire classification</b>                |                     |                                               |
| └ Europe                                  | UNE-EN 13501-1:2007 | C-s3,d0                                       |
| └ France                                  | NF P92-503          | M2                                            |
| └ Italy                                   | UNI 9177            | Class 1                                       |
| └ UK                                      | BS 5867             | C                                             |
| └ USA                                     | NFPA 701            | FR                                            |

| Natté 380 (end 31.12.2024) - white   turquoise (002014) |                      | Technical info      |                     |
|---------------------------------------------------------|----------------------|---------------------|---------------------|
| <b>Tear strength</b>                                    | ISO 4674-1 methode 2 |                     |                     |
| └ Original                                              |                      | WARP 4.90 daN       | WEFT 4.70 daN       |
| └ After climatic chamber -30°C                          |                      | WARP 5.10 daN       | WEFT 5.15 daN       |
| └ After climatic chamber +70°C                          |                      | WARP 5.30 daN       | WEFT 4.80 daN       |
| <b>Elongation up to break</b>                           | ISO 1421             |                     |                     |
| └ Original                                              |                      | WARP 3.70 %         | WEFT 3.20 %         |
| └ After color fastness to artificial light              |                      | WARP 3.70 %         | WEFT 3.00 %         |
| └ After climatic chamber -30°C                          |                      | WARP 4.00 %         | WEFT 3.00 %         |
| └ After climatic chamber +70°C                          |                      | WARP 3.60 %         | WEFT 2.90 %         |
| <b>Breaking strength</b>                                | ISO 1421             |                     |                     |
| └ Original                                              |                      | WARP 160.00 daN/5cm | WEFT 160.00 daN/5cm |
| └ After color fastness to artificial light              |                      | WARP 150.00 daN/5cm | WEFT 160.00 daN/5cm |
| └ After climatic chamber -30°C                          |                      | WARP 150.00 daN/5cm | WEFT 140.00 daN/5cm |
| └ After climatic chamber +70°C                          |                      | WARP 120.00 daN/5cm | WEFT 120.00 daN/5cm |

## Front - Interior

Natté 380 (end 31.12.2024) - white | turquoise  
(002014)

### Visual properties

|                                        |        |
|----------------------------------------|--------|
| <b>Tv = Visual light transmittance</b> | 16.30% |
| <b>Tuv = UV transmittance</b>          | 9.50%  |

### Solar energetic properties

|                                 |        |
|---------------------------------|--------|
| <b>As = Solar absorptance</b>   | 28.50% |
| <b>Rs = Solar reflectance</b>   | 48.00% |
| <b>Ts = Solar transmittance</b> | 23.50% |

### Fabric + glazing: G-factor

|                  | <b>G</b> | <b>Te</b> | <b>Qi</b> | <b>SC</b> |
|------------------|----------|-----------|-----------|-----------|
| <b>Glazing A</b> | 0.46     | 0.20      | 0.26      | 0.55      |
| <b>Glazing B</b> | 0.46     | 0.17      | 0.29      | 0.61      |
| <b>Glazing C</b> | 0.42     | 0.13      | 0.28      | 0.71      |
| <b>Glazing D</b> | 0.27     | 0.08      | 0.19      | 0.84      |

G = Total solar energy transmittance / Te = Direct solar transmittance / Qi = Secondary heat transfer factor / SC = Shading coefficient

### Visual comfort

|                                        |         |                    |
|----------------------------------------|---------|--------------------|
| <b>Normal solar transmittance</b>      | Class 3 | Good effect        |
| <b>Glare control</b>                   | Class 0 | Very little effect |
| <b>Privacy night</b>                   | Class 1 | Little effect      |
| <b>Visual contact with the outside</b> | Class 3 | Good effect        |
| <b>Daylight utilisation</b>            | Class 2 | Moderate effect    |

### Thermal comfort G-factor = Total solar energy transmittance

| <b>Glazing A</b> | <b>Glazing B</b> | <b>Glazing C</b> | <b>Glazing D</b> |
|------------------|------------------|------------------|------------------|
| Class 1          | Class 1          | Class 1          | Class 2          |

### Thermal comfort Qi-factor = Secondary heat transfer factor

| <b>Glazing A</b> | <b>Glazing B</b> | <b>Glazing C</b> | <b>Glazing D</b> |
|------------------|------------------|------------------|------------------|
| Class 1          | Class 1          | Class 1          | Class 2          |

Class 0 = Very little effect / 1 = Little effect / 2 = Moderate effect / 3 = Good effect / 4 = Very good effect

## Back - Interior

Natté 380 (end 31.12.2024) - white | turquoise  
(002014)

### Visual properties

|                                        |        |
|----------------------------------------|--------|
| <b>Tv = Visual light transmittance</b> | 16.30% |
| <b>Tuv = UV transmittance</b>          | 9.50%  |

### Solar energetic properties

|                                 |        |
|---------------------------------|--------|
| <b>As = Solar absorptance</b>   | 28.50% |
| <b>Rs = Solar reflectance</b>   | 48.00% |
| <b>Ts = Solar transmittance</b> | 23.50% |

### Fabric + glazing: G-factor

|                  | <b>G</b> | <b>Te</b> | <b>Qi</b> | <b>SC</b> |
|------------------|----------|-----------|-----------|-----------|
| <b>Glazing A</b> | 0.46     | 0.20      | 0.26      | 0.55      |
| <b>Glazing B</b> | 0.46     | 0.17      | 0.29      | 0.61      |
| <b>Glazing C</b> | 0.42     | 0.13      | 0.28      | 0.71      |
| <b>Glazing D</b> | 0.27     | 0.08      | 0.19      | 0.84      |

G = Total solar energy transmittance / Te = Direct solar transmittance / Qi = Secondary heat transfer factor / SC = Shading coefficient

### Visual comfort

|                                        |         |                    |
|----------------------------------------|---------|--------------------|
| <b>Normal solar transmittance</b>      | Class 3 | Good effect        |
| <b>Glare control</b>                   | Class 0 | Very little effect |
| <b>Privacy night</b>                   | Class 1 | Little effect      |
| <b>Visual contact with the outside</b> | Class 3 | Good effect        |
| <b>Daylight utilisation</b>            | Class 2 | Moderate effect    |

### Thermal comfort G-factor = Total solar energy transmittance

| <b>Glazing A</b> | <b>Glazing B</b> | <b>Glazing C</b> | <b>Glazing D</b> |
|------------------|------------------|------------------|------------------|
| Class 1          | Class 1          | Class 1          | Class 2          |

### Thermal comfort Qi-factor = Secondary heat transfer factor

| <b>Glazing A</b> | <b>Glazing B</b> | <b>Glazing C</b> | <b>Glazing D</b> |
|------------------|------------------|------------------|------------------|
| Class 1          | Class 1          | Class 1          | Class 2          |

Class 0 = Very little effect / 1 = Little effect / 2 = Moderate effect / 3 = Good effect / 4 = Very good effect