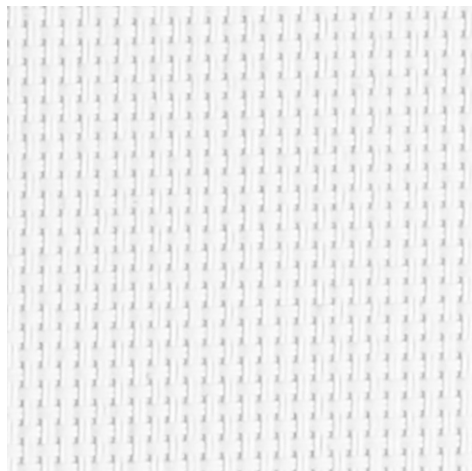
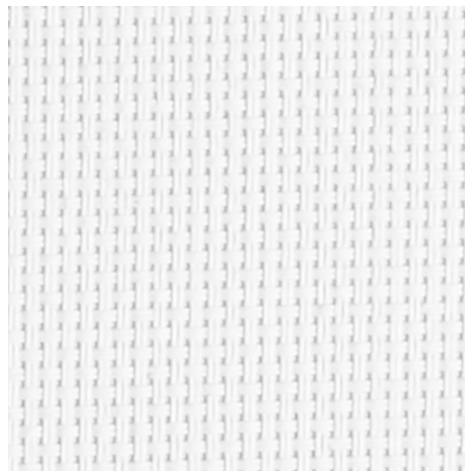


Natté 380 (end 31.12.2024) - WOW white
(092092)

Technical info
FRONT

BACK


Widths		250 cm
Composition		Fibreglass 36% - PVC 64%
Openness factor	NBN EN 410	5.00%
Weight	NF EN 12127	385.00 g/m ²
Thickness	ISO 5084	0.35 mm
Density	ISO 7211/2	WARP 20.00 yarn/cm WEFT 20.00 yarn/cm
Color fastness to artificial light	ISO 105 B02	>7
Roll length		30 m
Cleaning		With soapy water
Confection		By heat, high frequency or ultrasonic welding
Fire classification		
└ Europe	UNE-EN 13501-1:2007	C-s3,d0
└ France	NF P92-503	M2
└ Italy	UNI 9177	Class 1
└ UK	BS 5867	C
└ USA	NFPA 701	FR

Natté 380 (end 31.12.2024) - WOW white (092092)

Technical info

Tear strength		ISO 4674-1 methode 2	
└ Original		WARP 4.90 daN	WEFT 4.70 daN
└ After climatic chamber -30°C		WARP 5.10 daN	WEFT 5.15 daN
└ After climatic chamber +70°C		WARP 5.30 daN	WEFT 4.80 daN
Elongation up to break		ISO 1421	
└ Original		WARP 3.70 %	WEFT 3.20 %
└ After color fastness to artificial light		WARP 3.70 %	WEFT 3.00 %
└ After climatic chamber -30°C		WARP 4.00 %	WEFT 3.00 %
└ After climatic chamber +70°C		WARP 3.60 %	WEFT 2.90 %
Breaking strength		ISO 1421	
└ Original		WARP 160.00 daN/5cm	WEFT 160.00 daN/5cm
└ After color fastness to artificial light		WARP 150.00 daN/5cm	WEFT 160.00 daN/5cm
└ After climatic chamber -30°C		WARP 150.00 daN/5cm	WEFT 140.00 daN/5cm
└ After climatic chamber +70°C		WARP 120.00 daN/5cm	WEFT 120.00 daN/5cm

Front - Interior

Natté 380 (end 31.12.2024) - WOW white
(092092)

Visual properties

Tv = Visual light transmittance	26.30%
Tuv = UV transmittance	17.50%

Solar energetic properties

As = Solar absorptance	7.90%
Rs = Solar reflectance	63.60%
Ts = Solar transmittance	28.50%

Fabric + glazing: G-factor

	G	Te	Qi	SC
Glazing A	0.37	0.25	0.12	0.44
Glazing B	0.38	0.22	0.17	0.51
Glazing C	0.37	0.17	0.20	0.62
Glazing D	0.25	0.10	0.15	0.79

G = Total solar energy transmittance / Te = Direct solar transmittance / Qi = Secondary heat transfer factor / SC = Shading coefficient

Visual comfort

Normal solar transmittance	Class 3	Good effect
Glare control	Class 0	Very little effect
Privacy night	Class 1	Little effect
Visual contact with the outside	Class 1	Little effect
Daylight utilisation	Class 2	Moderate effect

Thermal comfort G-factor = Total solar energy transmittance

Glazing A	Glazing B	Glazing C	Glazing D
Class 1	Class 1	Class 1	Class 2

Thermal comfort Qi-factor = Secondary heat transfer factor

Glazing A	Glazing B	Glazing C	Glazing D
Class 2	Class 2	Class 2	Class 2

Class 0 = Very little effect / 1 = Little effect / 2 = Moderate effect / 3 = Good effect / 4 = Very good effect

Back - Interior

Natté 380 (end 31.12.2024) - WOW white
(092092)

Visual properties

Tv = Visual light transmittance	26.30%
Tuv = UV transmittance	17.50%

Solar energetic properties

As = Solar absorptance	7.90%
Rs = Solar reflectance	63.60%
Ts = Solar transmittance	28.50%

Fabric + glazing: G-factor

	G	Te	Qi	SC
Glazing A	0.37	0.25	0.12	0.44
Glazing B	0.38	0.22	0.17	0.51
Glazing C	0.37	0.17	0.20	0.62
Glazing D	0.25	0.10	0.15	0.79

G = Total solar energy transmittance / Te = Direct solar transmittance / Qi = Secondary heat transfer factor / SC = Shading coefficient

Visual comfort

Normal solar transmittance	Class 3	Good effect
Glare control	Class 0	Very little effect
Privacy night	Class 1	Little effect
Visual contact with the outside	Class 1	Little effect
Daylight utilisation	Class 2	Moderate effect

Thermal comfort G-factor = Total solar energy transmittance

Glazing A	Glazing B	Glazing C	Glazing D
Class 1	Class 1	Class 1	Class 2

Thermal comfort Qi-factor = Secondary heat transfer factor

Glazing A	Glazing B	Glazing C	Glazing D
Class 2	Class 2	Class 2	Class 2

Class 0 = Very little effect / 1 = Little effect / 2 = Moderate effect / 3 = Good effect / 4 = Very good effect

Front - Exterior

Natté 380 (end 31.12.2024) - WOW white
(092092)

Visual properties

Tv = Visual light transmittance	26.30%
Tuv = UV transmittance	17.50%

Solar energetic properties

As = Solar absorptance	7.90%
Rs = Solar reflectance	63.60%
Ts = Solar transmittance	28.50%

Fabric + glazing: G-factor

	G	Te	Qi	SC
Glazing A	0.27	0.25	0.02	0.32
Glazing B	0.24	0.22	0.03	0.32
Glazing C	0.19	0.17	0.02	0.32
Glazing D	0.12	0.09	0.03	0.39

G = Total solar energy transmittance / Te = Direct solar transmittance / Qi = Secondary heat transfer factor / SC = Shading coefficient

Visual comfort

Normal solar transmittance	Class 3	Good effect
Glare control	Class 0	Very little effect
Privacy night	Class 1	Little effect
Visual contact with the outside	Class 1	Little effect
Daylight utilisation	Class 2	Moderate effect

Thermal comfort G-factor = Total solar energy transmittance

Glazing A	Glazing B	Glazing C	Glazing D
Class 2	Class 2	Class 2	Class 3

Thermal comfort Qi-factor = Secondary heat transfer factor

Glazing A	Glazing B	Glazing C	Glazing D
Class 4	Class 4	Class 4	Class 4

Class 0 = Very little effect / 1 = Little effect / 2 = Moderate effect / 3 = Good effect / 4 = Very good effect

Back - Exterior

Natté 380 (end 31.12.2024) - WOW white
(092092)

Visual properties

Tv = Visual light transmittance	26.30%
Tuv = UV transmittance	17.50%

Solar energetic properties

As = Solar absorptance	7.90%
Rs = Solar reflectance	63.60%
Ts = Solar transmittance	28.50%

Fabric + glazing: G-factor

	G	Te	Qi	SC
Glazing A	0.27	0.25	0.02	0.32
Glazing B	0.24	0.22	0.03	0.32
Glazing C	0.19	0.17	0.02	0.32
Glazing D	0.12	0.09	0.03	0.39

G = Total solar energy transmittance / Te = Direct solar transmittance / Qi = Secondary heat transfer factor / SC = Shading coefficient

Visual comfort

Normal solar transmittance	Class 3	Good effect
Glare control	Class 0	Very little effect
Privacy night	Class 1	Little effect
Visual contact with the outside	Class 1	Little effect
Daylight utilisation	Class 2	Moderate effect

Thermal comfort G-factor = Total solar energy transmittance

Glazing A	Glazing B	Glazing C	Glazing D
Class 2	Class 2	Class 2	Class 3

Thermal comfort Qi-factor = Secondary heat transfer factor

Glazing A	Glazing B	Glazing C	Glazing D
Class 4	Class 4	Class 4	Class 4

Class 0 = Very little effect / 1 = Little effect / 2 = Moderate effect / 3 = Good effect / 4 = Very good effect